



Product Specification

Vendor : Longkong

Date: 17-Nov-15
 Updated: 18-Jan-2016
 Changed packing pic at 2016/7/19
 Added PDF manual at 21-7-2016
 Updated: 06-09-2016
 Updated on 20161207
 Updated on 20170303
 Updated on 2017/5/29
 Updated on 2017/6/01

Pictures & Description



Manutan Czech code: 1132130, 1132131, 1132132
 Supplier code:SK3069B
 Description: office chair
 Overall size(mm):W620-640x670x985-1080mm
 Weight:16.14kg

Mesh Back

Material of shell and support: Plywood
 Color: Black, blue, grey
 Fabric color: black(DW32), grey(DW33), blue(DW30)
 Fabric feature : Fire retardant
 Dimension(mm) L690xW490xT60mm
 Foam density: PU moulded foam 50 kg/m3
 Seat



Material of shell: Plywood
 Color: Black
 Fabric Color: Black(DW32)
 Foam density: Block foam 35kgs/m3
 Fabric feature : Fire retardant
 Foam feature Fire retardant
 Dimension : L510xW500xT70mm
 Seat Height(mm): Adjustable height 445~545mm
 Armrest



Material: PP
 Finish: PP in silver coating
 Feature: adjustable
 Color: Silver/black
 Feature: Adjustable height 75mm
 Armrest size: W245 x D75 x H305mm



Height between ground and armrest (with seat at its lowest position): 635~710mm

Height between ground and armrest (with seat at its highest position): 725~800mm

Mechanism

Material: Metal
Color: Black
Feature: Synchronous contact, multi position locking



Gas lift

Material: Radius 340mm
Description: 100mm lift
Warranty: 2 years
Brand: Lant Class 3



Feature: Black sleeve

Base

Material: Nylon
Color: Black
Dimension: Radius 340mm
Style: 5 pcs dual roller wheels



Caster

Material: Nylon
Color: Black
Qty: 5 pcs , dual roller wheels
Caster Dia : 60mm



Loading capacity

Max. loading capacity 120kg

Sitting time

Maintains optimal posture for 8 hours

Key Factors

1. Passed EN 1335 , EN 1021 Test ,with GS certificates
2. All mechanism works well, no noise when making adjustment or in use

Manual





SK3069B 1132130_ma_multilang.pdf



1132130-1132132_(SK3069B).pdf

Shipping marks

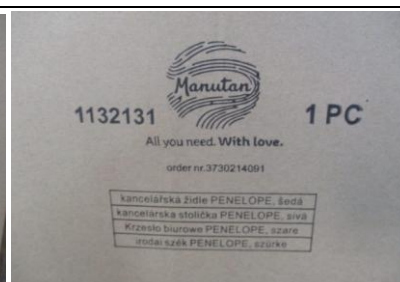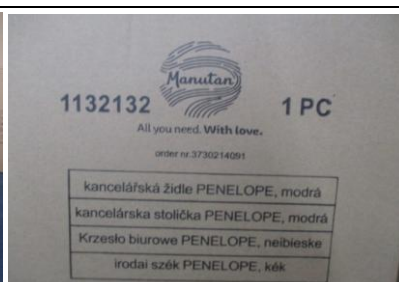



Packing



The foam of seat shall be closed to the carton

1 set in a master carton