

Product Specification

eastwise asia sourcing & procurement

Updated on 2016/3/7 Updated on 2016/12/15 Updated on 2016/12/15

Manutan ERP No.:A135398 Manutan SKu.:1986-77 Vendor Item No.: MNT077

Description: Expanding barrier - 2,3m **Color:** White(Ral 9003) + Red(Ral 3020) **Overall size:** L2300 x W500 x H1054mm

Weight: 7.15Kgs




Key Parts Specification:

Main Stand Tube: L31xW31xH930xT1.0mm(after coating), Color Red (Ral 3020),2pcs

Movable Tube: L25xW12xH880xT0.8mm(after coating), Color Red (Ral 3020) + White (Ral 9003),10pcs

Base Tube: Dia33xL500xT1.5mm(after coating), Color Red (Ral 3020),2pcs
Finishes: Galvanized Steel + Powder coated should be thicker than 50um

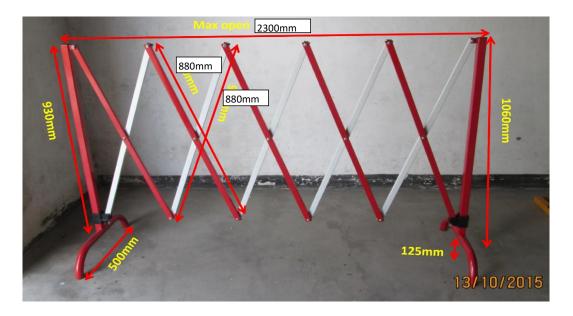

Length after folded (245mm)



Auto locker









Plastic Pads













Washer(electroplate)

Thickness:1.8-2mm







Screws(ss 201)







Key Factors

- 1. The dimension of the barriers should be consistent, tolerence is ± 8 mm.
- 2. The thickness should be within 5% tolerance as requirement
- 3. No obvious scratch,rust,oxidation mark.
- 4. Product should be stable on the ground, no wobbling.
- 5. UV protection test for 180 hours/ Grey scale class 4, salt spray test 240hours no rust found
- 6. Tubes does not interfere with each other when the rail being extended or folded
- 7. No poly-putty base used for welding.

Carton Specification						
_						
	Carton Dimension(cm)	Corrugate Board	Flutes	Strength (Bursting)	Joint	Style
Master Carton	L95xW8xH26cm	Double wall(5 layer)	A, B	7 kgf / cm ²		RSC




RSC carton

Packaging method
KD package then 1pcs into 1 carton box.

Assembly Instruction

UserGuide_Barriers_A135398 _15_LG.pdf

Label on sell unit and stick on 1 side, Label size: W100xH130mm

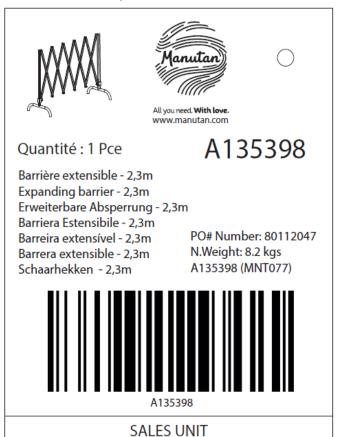

Label on Master Shipping Carton and stick on 2 sides, Label size: W100xH130mm

